

CRACK-FREE MEMBRANE

DESCRIPTION

PROFLEX™ CFM is a 40 mil composite underlayment consisting of a rubberized membrane laminated to a high-strength reinforcing fabric on the face and a siliconized release sheet on the adhesive side. Designed specifically for the home builder to eliminate typical flooring problems.

TYPICAL USE

PROFLEX™ CFM is specially designed to be used under thinset or mudset mortars and adhesives for interior and exterior applications of ceramic tile, stone, and brick, and for interior applications of wood flooring to eliminate the transmission of cracks and to reduce moisture vapor transmission. Other applications also may be suitable. Contact technical support for further information. To eliminate cracks in finished floor work, the product should be applied to the entire substrate prior to the installation of the finished flooring.

ADVANTAGES

- Easy and fast to install with standard tools
- Ready for tiling immediately after installation
- Slab on grade wood flooring installation
- Moisture vapor transmission reduction up to 5#/1000 sq. ft./24 hours when installed with PROFLEX™ RST
- Crack and joint isolation up to 3/8"

SUITABLE SUBSTRATES

- Concrete
- Mortar beds
- Cement terrazzo
- Exterior-grade plywood
- Cement backer board
- Urethane membranes, fiberglass decks, other materials (contact technical support)

NOTE: Some substrates do not require primer; call Technical Support for assistance.

MEMBRANE AND PRIMER PACKAGING

PROFLEX™ CFM
3'X 65' rolls, 195 sq ft/roll, 20 rolls/pallet

PROFLEX™ Primers

PR10, water-based, 1-gallon can
PR11, water-based, 1-gallon pail
PR27, solvent-based, 1-gallon can
Approximate coverage: 300-500 sq ft/gallon

MEMBRANE AND PRIMER SHELF LIFE

PROFLEX™ CFM: Factory-sealed containers of this product are guaranteed to be of first quality for two (2) years if stored at temperatures between 32°F and 110°F.

PROFLEX™ Primers: Shelf life of one (1) year when stored at temperatures between 45°F and 110°F

Crack-Free Vapor Reduction Membrane Data Sheet

TECHNICAL DATA

Physical Properties

Property	Test Method	Results
Total thickness		40 mil
Fabric thickness		6 mil
Elongation	ASTM D882	350% min
Tensile MD	ASTM D1682	1270 psi
Pliability	ASTM D146	Pass-25
Adhesion to plywood	ASTMD1790	8 lb/in
Adhesion to primed concrete	ASTM D903	10 lb/in
Robinson test	ASTM C627	Heavy-duty

LIMITATIONS

- Substrate must be primed with PROFLEX™ Primer. (Some substrates do not require primer; call Technical Support.)
- Impervious tile (less than 0.5% absorption) may require a 48-hour cure prior to grouting. The mortar will be sandwiched between two nonabsorptive materials and will require additional cure time. Cooler weather will also increase set time. Consult mortar manufacturer for additional requirements.
- Not for use over expansion joints (structural design joints) or structural (out-of-plane) movement cracks.
- Not recommended for use on concrete floors when hydrostatic pressure is present.
- Maximum 1/4" seam for crack isolation.
- Protect Primers from freezing.
- Perimeter expansion of 1/4" minimum must be maintained for warranty.
- This product should not be stored in direct sunlight.
- Use ANSI 118.4 mortar.
- When moisture vapor pressure will exceed 5#/1000 sq. ft./24 hours, call Technical Support for assistance.

Proflex Products, Inc.
3406 Dean Street Naples, FL 34104
877-5PROFLEX Fax: 877-283-1511

For additional technical Support,
Contact 877-538-3437


www.proflexcism.com

Proudly made in the U.S.A.

CRACK-FREE MEMBRANE

State of the Art Crack Isolation
and Vapor Reduction Membrane

PROFLEX™ CFM Moisture Vapor Barrier System

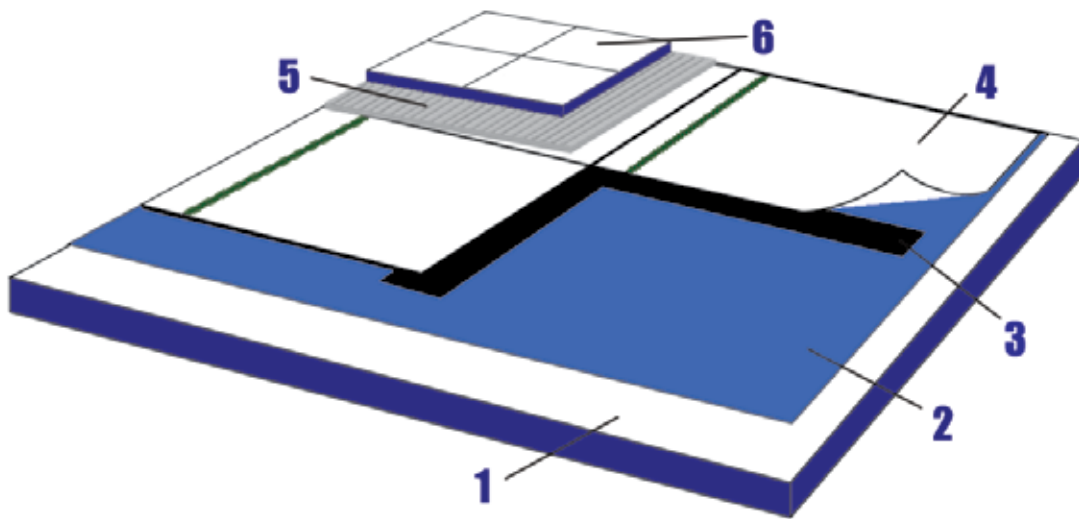

- (6) Tile or Stone
- (5) Thinset or Mud Bed
- (4) Proflex™ CFM
- (3) Proflex™ RST
- (2) Proflex™ Primer
- (1) Substrate

Proflex Products, Inc.
3406 Dean Street Naples, FL 34104
877-5PROFLEX Fax: 877-283-1511

For additional technical Support,
Contact 877-538-3437

www.proflexcism.com



Proudly made in the U.S.A.