


PROFLEX™

CRACK-FREE MEMBRANE

State of the Art Crack Isolation and Vapor Reduction Membrane

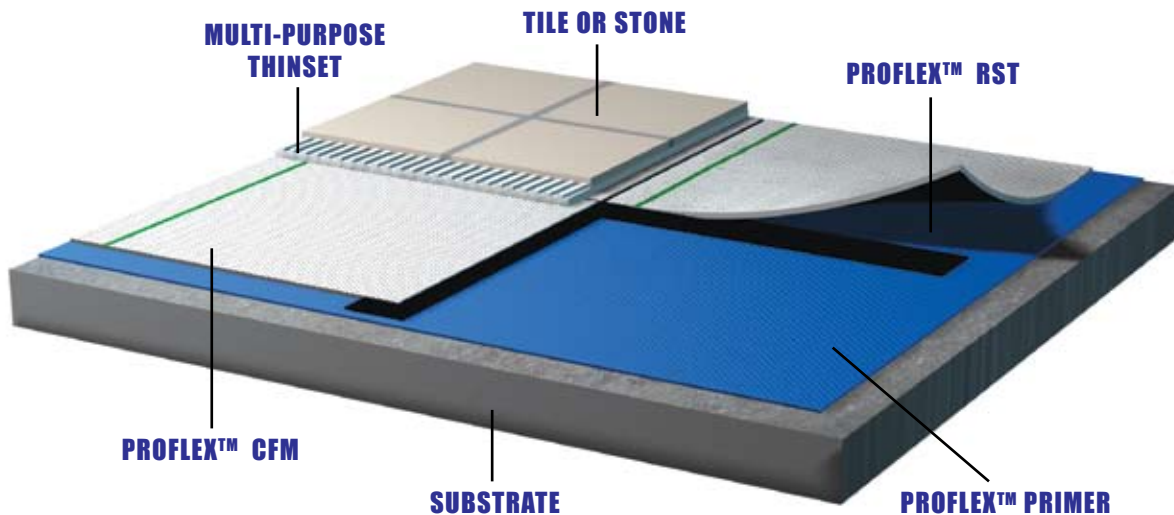

PROFLEX™ CFM is a self-bonding, reinforced, 40 mil-thick elastomeric crack isolation and moisture vapor reduction membrane. The membrane forms a permanent bond to concrete, steel, or wood substrates and is compatible with most cementitious, epoxy, and urethane adhesives.

PROFLEX™ CFM is designed specifically for the home builder to eliminate typical flooring problems. Bridges cracks and controls joints up to 3/8" wide, eliminating the transfer of cracks to the finished flooring.

PROFLEX™ is specially designed to be used under thinset and mudset mortars and adhesives for interior and exterior applications of ceramic tile, stone, and brick, and for interior applications of wood flooring. Other applications also may be suitable. Contact Technical Support for additional information.

PROFLEX™ CFM will reduce or eliminate moisture vapor transmission from concrete substrates. This property makes the Proflex™ CFM a suitable underlayment for slab on grade wood flooring installations as well. Proflex™ CFM will tolerate moisture vapor transmission up to 5#/1000 sq. ft./24 hours (as tested with a calcium chloride test kit). For vapor reduction in excess of the above, please contact Technical Support for additional information.

Proflex Products, Inc.
3406 Dean Street Naples, FL 34104
877-5PROFLEX Fax: 877-283-1511

For additional technical Support,
Contact 877-538-3437

www.proflexcism.com

Proudly made in the U.S.A.

PROFLEX™
CFM

PROFLEX™

CRACK-FREE MEMBRANE

PROFLEX™ CFM warranty terms are up to ten (10) years, based on the system of materials used to install the finished flooring products.

PROFLEX™ CFM Summary of Features and Benefits

- ▶ Easy to install
- ▶ Exterior or interior conditions
- ▶ Wet or dry conditions
- ▶ Crack and joint isolation up to 3/8"
- ▶ Moisture vapor reduction up to 5#/1000 sq. ft./24 hours
- ▶ No waiting time for the installation of floor covering materials.

PROFLEX™ CFM Recommended Substrates

May be applied over properly prepared substrates including (but not limited to): concrete slabs; precast panels; lightweight toppings; patching, leveling, and repair compounds; cement backer boards; terrazzo; ceramic tile; plywood; OSB board; particle board; steel; radiant-heated substrates; or masonry block. Some substrates do not require a primer; call Technical Support for more information.

Proflex Products, Inc.
3406 Dean Street Naples, FL 34104
877-5PROFLEX Fax: 877-283-1511

For additional technical Support,
Contact 877-538-3437

www.proflexcism.com

